

TECHNICAL SPECIFICATIONS

SWXFR1230120 VAC Series
3000W True Sine Wave Inverter with Transfer Switch




Product features


- 6000W startup surge capability.
- True sine wave output for sensitive electronics.
- Auto transfer from shore power to AC.
- 30 millisecond transfer time.
- Built in LED display for battery status and load measurement.
- Twin GFCI outlets (North America).
- AC hardwire capable.

Product dimensions

Length: 21.2" x Width: 9.1" x Height: 4.5" (538.48 x 231 x 114mm)

Specifications subject to change without notice.

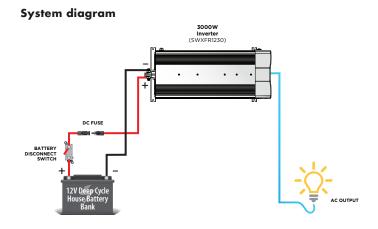



kisaepower.com

KISAE Power Inverter



SIDE VIEW

6.6

SWXFR1230

120 VAC Series 3000W True Sine Wave Inverter with Transfer Switch

| AC Output | |
|--------------------|-------------------------|
| Power (Continuous) | 3000W |
| Power (Peak) | 6000W |
| Voltage/Frequency | 120VAC / 60 Hz |
| Current | 25.0A |
| Waveform | True Sinewave (<3% THD) |
| Peak Efficiency | 90% |
| AC Receptacle | NEMA 5-20 x 2 |

| Accessories (optional) | | |
|------------------------|---|--|
| Ignition Start Module | ISRM01 | |
| Enclosure | | |
| Dimensions (L x W x H) | 21.2" x 9.1" x 4.5" (538.48mm x 230mm x 114mm | |

16.2 lbs. / 7.35 Kg

| Schematic | D |
|-----------|----------|
| Schematic | Drawinas |
| | |

SIDE VIEW

Net Weight

21.2 inches

DC Output 5V USB 2.1A **DC Input** Voltage (nominal) 12.5Vdc Operation Range 10.5 - 15.5Vdc Inverter Standby Current (no load) <1.5A

| current (run loud) | | |
|----------------------------|---------|--|
| Protection | | |
| Input Undervoltage Warning | 10.5Vdc | |
| Input Overvoltage Shutdown | 15.5Vdc | |

01 A

| Display Panel | |
|---------------------|--|
| LED Indicator | Status |
| LED Digital Display | Input Voltage, Output Power, Warning, Error Code |

AC Transfer Switch

Current (full load)

| Transfer Time | <30ms | | |
|-----------------------|-------|--|--|
| Transfer Relay Rating | 30A | | |

Regulatory Compliance

| Markings | cETLus | / | CE, e-Mark |
|-------------|-------------------------------|---------|------------|
| Conformance | UL & CSA Standards / LVD, EMC | | |
| EMI/EMC | FCC Part 15 | Class B | |

Available outputs






To learn more about this and other fine Kisae products please contact:

info@kisaetechnology.com

TOP VIEW 0 •Ø\\\\E 0 538.48 mm 421.64 mm C 4.5 inche 216 mm 114 mm 230 mm



Standard warranty

1 year warranty

All specifications subject to change without notice. Copyright © 2022 Kisae Technology Inc. All Rights Reserved under UCC 1-308 without prejudice.

Distributor: