


TECHNICAL SPECIFICATIONS

DMTRM1201

For use with DMT1230 or 1250 DC - DC chargers

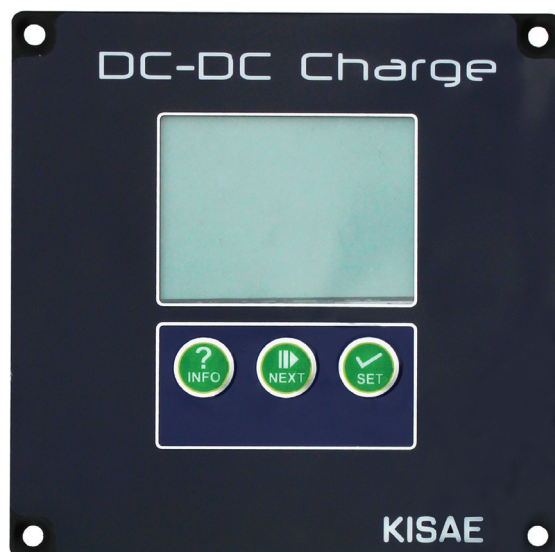

Product Description

The DMTRM1201 Remote Panel is a full-function remote that allows you to monitor and control KISAE DMT 1230 and 1250 DC-DC Battery Chargers from a remote location. The remote functions identical to the DMT controls located on the charger and displays critical information on charging of batteries. It is very easy to install, read and operate, connecting with the battery charger through the included communication cable. Includes 25ft cable and template for mounting.

Product Features

- Remote Panel for monitoring KISAE DMT DC-DC Battery Chargers
- Easy to install in your boat, van or RV
- Provides information about battery status and fault conditions
- Full remote control of charger functions
- Real-time voltage, current, and charge status display
- Multi-stage charging visibility (Bulk / Absorption / Float)
- Plug-and-play installation with included cable
- Compact, low-profile panel design
- Integrated fault detection and diagnostics
- Easy-to-read LCD interface
- Ideal for hidden or remote charger installations

Product Dimensions

Length: approx. 3.94 in x 3.94 in x 1.0 in (100 x 100 x 25 mm)
Weight: approx. 0.35 lb (160 g)

Panel Connection



RJ12 HARDWIRE

Specifications subject to change without notice.

DMTRM1201 For use with DMT1230 or 1250 DC - DC chargers

Product Features

Compatibility:	KISAE DMT Series DC-DC Battery Chargers
Functionality:	Full remote monitoring and control (mirrors onboard charger interface)
Display Type:	Backlit LCD display
Data Displayed:	Charging status, voltage, current, battery type, fault/status indicators

Electrical

Operating Voltage:	Supplied via connected DMT charger (no external power required)
Communication Interface:	Wired (RJ-type communication port)
Cable Length (Included):	25 ft (7.6 m)

Display Panel

Digital Display	LCD display with back lighting (Voltage, Current, Status, Error Code)
Communication	CANBUS


Enclosure

Input Connection	Hardwire
Mounting:	Panel mount (flush or surface)
Mounting Template:	Included

Physical Size

Dimensions (L x W x H)	approx. 3.94 in x 3.94 in x 1.0 in (100 x 100 x 25 mm)
Weight	approx. 0.35 lb / 160 g

Schematic Drawings

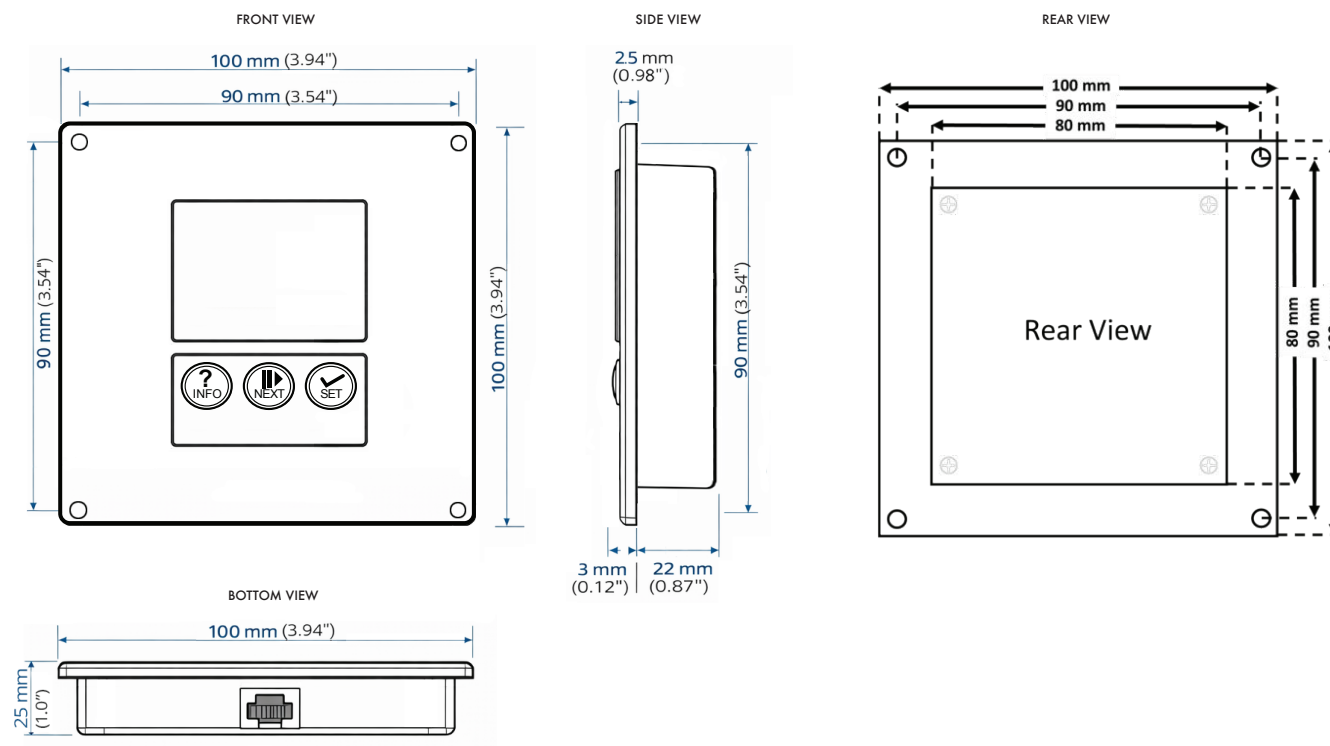

Additional Features

Plug-and-play installation
Intuitive user interface
Compact, low-profile design
Designed for mobile and fixed installations

Standard Warranty

2 year warranty

All specifications subject to change without notice.
Copyright © 2026 Kisa Technologies Inc. All Rights Reserved under UCC 1-308 without prejudice.

To learn more about this and other fine products please contact:

info@kisaepower.com

kisaepower.com

Distributor: